


waterra

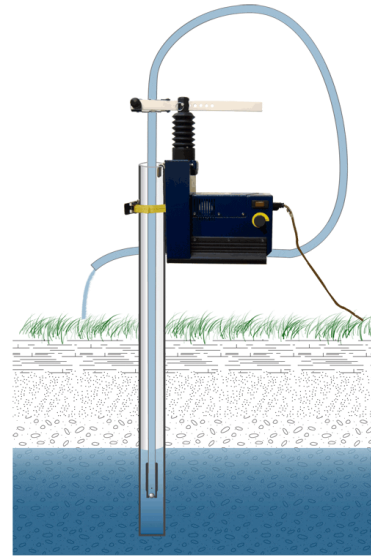

Waterra Hydrolift Pump – Features

- **Fully adjustable** — the Waterra Hydrolift Pump -Tubing Actuator is fully adjustable and will adapt to almost any size casing or protective well casing and can also be used with flush grade well completions.
- **Anchored discharge end of tubing** — the Hydrolift supports the Waterra Tubing and also anchors the discharge end of the tubing facilitating sample collection.
- **Available in** either 110 volt or 220 volt AC
- **Great for use when developing monitoring wells**
- **Reduces fatigue** — the use of this automated Waterra Pump System Tubing Actuator will eliminate the fatigue that can be experienced on large monitoring programs.
- **Hinged tubing clamp**
- **Suitable for use with** Low, Standard Flow and High Flow Waterra Pumping Systems
- **Adapts to** almost any size casing or protective well casing

Dimensions

L	W	H
15 in	7 in	20 in
38 cm	18 cm	51 cm

Electric Motor

110 V or 220 V
6 amps
3/4 hp (560 watts)

Weight

38 pounds (17.25 kg)

Actuator Stroke

4 in (10 cm)
0 – 140 cycles per min